

Brixton Triple



White



PRODUCT DESCRIPTION

The BRIXTON TRIPLE is a recessed adjustable gimbal downlighter with an output of up to 134 LI/cW and 9800 delivered lumens overall.

Featuring an adjustable tilt of up to 80 degrees in any direction, the BRIXTON comes standard with a specular 40° general beam reflector. It offers three beam angle options and is available with one, two, or three gimbal housings. Built with a Tridonic SLE LED module and driver system, the BRIXTON provides exceptional versatility to meet a wide range of accent lighting needs.


The BRIXTON is ideal for retail, restaurants, architectural, commercial and exhibition lighting.

Supplied in white as standard with three other options available.

FEATURES

- Ingress Protection
- Colour Temperature
- White

DIMENSIONS

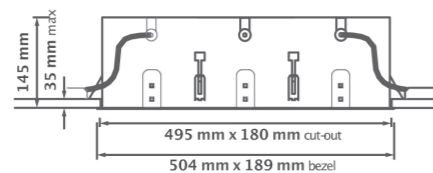

	mm
L	504
W	189
D	145
Cut out	495 x 180
KG	2.2Kg

PRODUCT DATA

BRIXTON TRIPLE				
Product code	Circuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW
GENERAL BEAM				
363.MF40.3225.840	24	3225	4000	134
363.MF40.5400.840	42	5400	4000	129
363.MF40.7350.840	57	7350	4000	129
363.MF40.9825.840	84	9825	4000	117
363.MF40.3075.830	24	3075	3000	128
363.MF40.5175.830	42	5175	3000	123
363.MF40.7125.830	57	7125	3000	125
363.MF40.9450.830	84	9450	3000	113

PRODUCT OPTIONS


- Correlated colour temp suffix .830K
- 3hr Emergency suffix .EM3
- Dali suffix .D1
- Emergency Dali suffix .EMD3
- Building Information modelling (Please Download from our website)
- Emergency Self Test suffix.EMST3
- Multi Facet 25° Narrow Beam .MF25
- Multi Facet 60° Wide Beam .MF60
- Black Finish suffix .B
- Black Frame White Gimbal suffix .BW
- White Frame Black Gimbal suffix .WB

LED PERFORMANCE

25° Ambient Temperature	L70/B50
BRIXTON TRIPLE	55,000

L' Value = % of initial Lumens maintained after specified time
B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

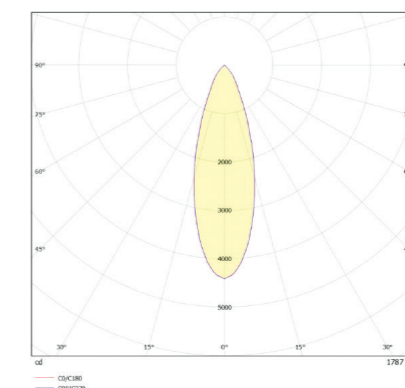

- Brixton triple head MF40
- Output - 1787lm
- Watts - 14
- LOR - 100%