



PRODUCT DATA

CORONA				
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW
405.MF60.1460.840	13	1460	4000	112
405.MF60.1990.840	20	1990	4000	100
405.MF60.2670.840	27	2670	4000	99
405.MF60.3350.840	35	3350	4000	96
405.MF60.3820.840	42	3820	4000	91

119

LI/cW

L80

60,000

PRODUCT DESCRIPTION

The CORONA LED is a classic pendant light that delivers exceptional targeted illumination for a variety of commercial applications. This sleek fixture features a modern aesthetic with a black, powder-coated aluminium housing (RAL9005S) and a suspended design (1.5m cable included) for easy placement. A white option (RAL9003S) is also available.

A 60° faceted aluminium reflector focuses the light beam, ideal for highlighting specific areas in retail stores, public spaces, showrooms, hotels, and exhibition halls. A clear PMMA diffuser ensures a smooth and even spread of light within the focused beam. Despite its sleek design, the CORONA delivers an impressive output of up to 128 lumens per watt (Lm/W), translating to a total of 3300 lumens.

The CORONA combines modern design, focused illumination, and ease of installation with its durable aluminium housing, making it a perfect choice for a variety of commercial lighting needs.

PRODUCT OPTIONS

Correlated colour temp
suffix .830

Dali
suffix .D1

MF24

Multi Facet 24°
available MF24

MF32

Multi Facet 32°
available MF32

W

White Finish
suffix .W

Other finishes
available –
specify RAL code

FEATURES

Ingress Protection

Colour
Temperature

B

Black

DIMENSIONS


	mm
D	315
H	300
CABLE	1500
KG	1.00

LED PERFORMANCE

25° Ambient Temperature	L80/B10
CORONA	60,000

'L' Value = % of Initial Lumens maintained after specified time
'B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

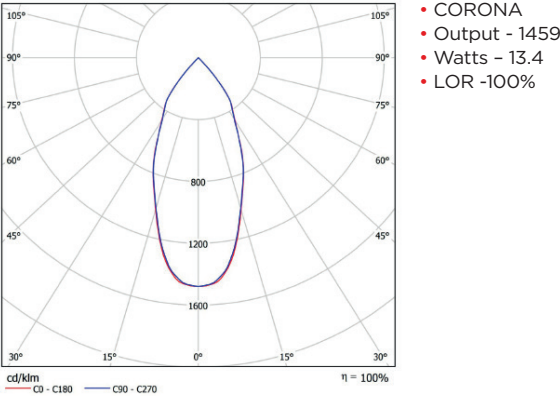

- CORONA
- Output - 1459
- Watts - 13.4
- LOR -100%