Delta Suspended



L70
50,000

LiFePO^4

PRODUCT DESCRIPTION

The DELTA SUSPENDED is a versatile LED exit light ideal for escape routes and final exits. Compatible with both new installations and retrofits, DELTA ensures flexibility across projects. Using advanced LED technology, it provides high performance and energy efficiency.

Choose between standard manual testing or DALI Self-Test for easier maintenance. A remote control (sold separately) enables quick, efficient testing across all DELTA models.

Designed for ease of installation and maintenance, DELTA's adaptable format suits many applications, from schools and shopping centres to offices and warehouses.

PRODUCT DATA

DELTA				
Product code	**Application**	**Colour Temp**	**Circuit Watts (w)**	**Delivered Lumens**
881.150	Suspended	4000	1	150

- Each DELTA comes with all options of the legends illustrated below.

PRODUCT OPTIONS

DALI +EM — Emergency Dali
suffix .EMD3

ST — Emergency Self Test
suffix .EMST3

LEGENDS



Arrow Down
Single Sided 881.150.**LG1**



Arrow Right
Single Sided 881.150.**LG2**



Arrow Left
Single Sided 881.150.**LG3**



Arrow up
Single Sided 881.150.**LG4**


FEATURES

IP20 — Ingress Protection

4000k — Colour Temperature

24m — Legend Viewing Distance

DIMENSIONS

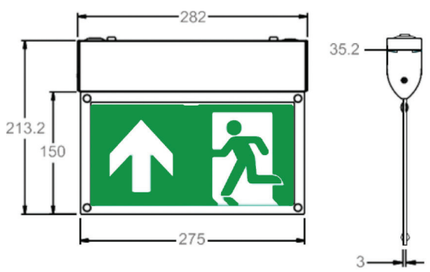

	mm
L	275
W	35
H	213
KG	1

LED PERFORMANCE

25˚ Ambient Temperature	L70/B50
DELTA	50,000

'L' Value = % of initial Lumens maintained after specified time
'B' Value = % of fittings failing to meet operational expectations after specified time