

PRODUCT DESCRIPTION

The DRAKE 2 LED exterior wall luminaire. Rounded, industrial aesthetics provide a decorative solution to amenity lighting. High efficiency with an output of 4500 lumens and efficacy of 112 LI/cW and a full cut-off geometry ensures zero uplight meeting dark sky requirements. Can be mounted over a BESA or 100mm back box.


Diecast aluminium construction, finished in textured black (RAL9005) powdercoat over a chromate conversion. Sealed to IP66 with a clear, one part UV stabilised polycarbonate lens array.

By minimising glare and reducing light trespass and skyglow, this product has been rated DarkSky approved.

FEATURES

- Ingress Protection
- Colour Temperature

DIMENSIONS

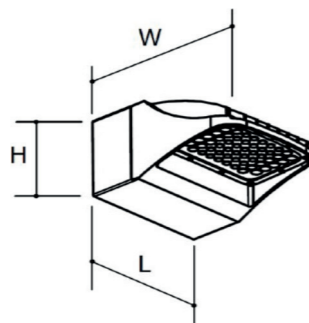

mm	
L	220
W	280
H	146
KG	6

PRODUCT DATA

DRAKE				
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW
775.3200.840	28	3200	5000	112
775.4500.840	42	4500	5000	106

PRODUCT OPTIONS


- Correlated colour temp suffix .830
- Correlated colour temp suffix .850
- 3hr Emergency suffix .EM3
- Photocell suffix .S6

LED PERFORMANCE

25° Ambient Temperature	L70/B70
DRAKE	100,000

'L' Value = % of initial Lumens maintained after specified time
'B' Value = % of fittings falling to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

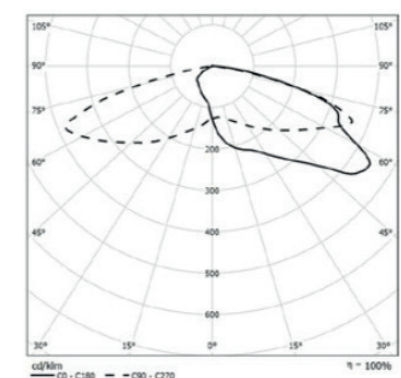

- DRAKE
- Output - 4500
- 42W
- LOR - 100%