

Force 22 Hygiene



PRODUCT DESCRIPTION

The FORCE 22 HYGIENE is a 600mm x 600mm recessed modular, sealed to IP65 and finished in corrosion resistant polyester powder-coat and is designed with harsh environments in mind.


Using the latest high efficiency Samsung LED chip technology provides an impressive output of up to 138 LI/cW and 6400 delivered lumens overall. The unique diffuser eliminates harsh contrasts and provides a flawless low glare light transmission achieving optimum wall and ceiling illuminance.

Dali control gear and pre-wired flex are also available as an option to ensure ease of installation. The FORCE 22 HYGIENE is ideal for kitchens, swimming pools and other harsh or wet environments.

FEATURES



DIMENSIONS

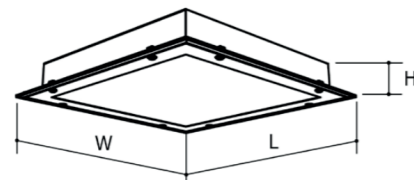

	mm
H	92
W	595
L	595
KG	6.9
KG (Em)	7.9

PRODUCT DATA

FORCE 22 HYGIENE					
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW	Em Lumens
610.2200.840	16	2200	4000	138	350
610.3300.840	25	3300	4000	138	350
610.3800.840	29	3800	4000	136	350
610.4600.840	36	4600	4000	131	350
610.5800.840	47	5800	4000	123	350
610.6400.840	53	6400	4000	123	350

PRODUCT OPTIONS


Correlated colour temp suffix .830	3hr Emergency suffix .EM3	Wireless suffix .S5	1m LSF LSF. 1
Correlated colour temp suffix .857	Dali suffix .D1	Building Information modelling (Please Download from our website)	3m LSF LSF. 3
Correlated colour temp suffix .TW	Emergency Dali suffix .EMD3	Emergency Self Test suffix .EMST3	5m LSF LSF. 5
			7m LSF LSF. 7

LED PERFORMANCE

25° Ambient Temperature	L70/B50	L80/B50
FORCE 22 HYGIENE	60,000	50,000

'L' Value = % of initial Lumens maintained after specified time
'B' Value = % of fittings falling to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

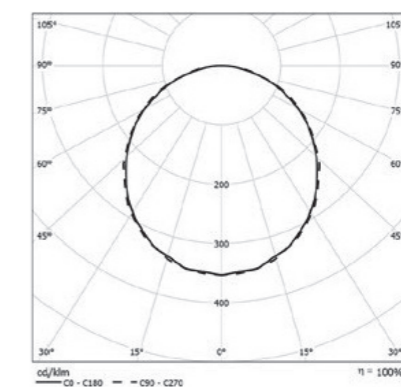

- FORCE 22 HYGIENE
- Output - 5800
- 66W
- LOR - 100%
- SHR MAX = 1.6:1