


Force 22

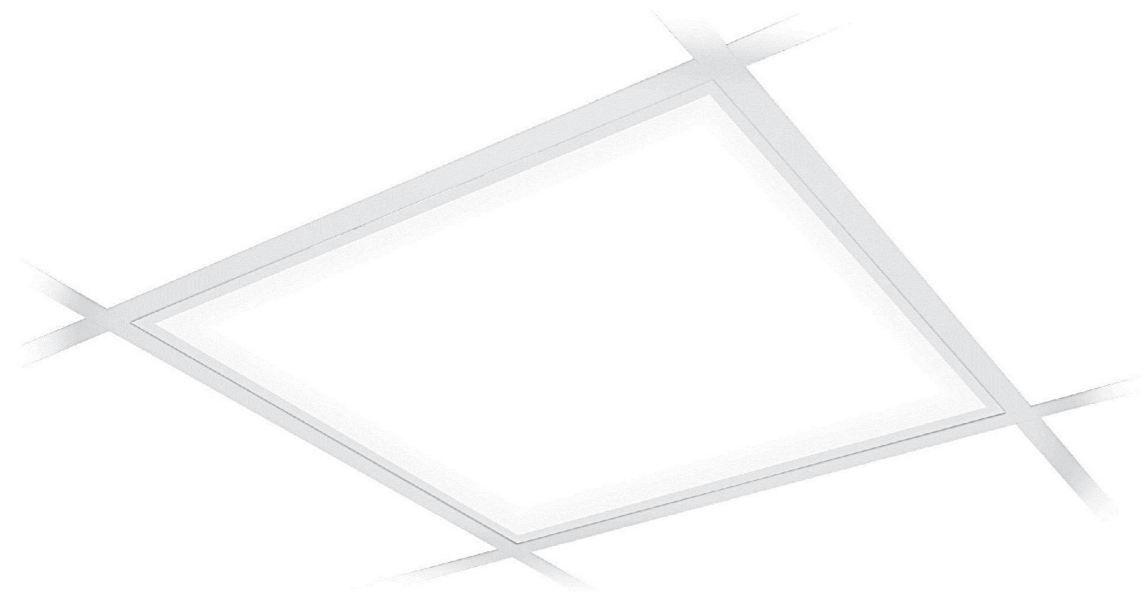

PRODUCT DESCRIPTION

The Force 22 LED is a 600mm x 600mm recessed modular panel designed to offer maximum efficiencies using the latest high efficiency Samsung LED chip technology. With an impressive output of up to 144 LI/cW and 7900 delivered lumens overall.


The unique diffuser eliminates harsh contrasts and provides a flawless, low glare light transmission achieving optimum wall and ceiling illuminance. Fabricated sheet steel powder coated body. DALI control gear and pre-wired flex are also available as an option to ensure ease of installation.

The FORCE 22 is ideal for open offices, classrooms, general corridors and commercial areas.

FEATURES

- Ingress Protection
- Colour Temperature
- TPa Rated

DIMENSIONS

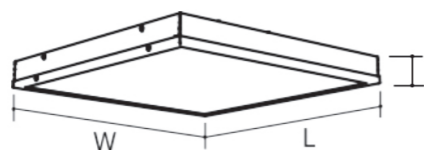

	mm
H	60
W	595
L	595
KG	4.5
KG (Em)	5.5

PRODUCT DATA

FORCE 22					
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW	Em Lumens
110.1900.840	14	1900	4000	136	440
110.2400.840	17	2400	4000	141	440
110.3300.840	23	3300	4000	143	440
110.4200.840	30	4200	4000	140	440
110.5200.840	37	5200	4000	141	440
110.6200.840	44	6200	4000	141	440
110.7900.840	55	7900	4000	144	440

PRODUCT OPTIONS


Correlated colour temp suffix .830	3hr Emergency suffix .EM3	Wireless suffix .S5	1m LSF LSF. 1
Correlated colour temp suffix .857	Dali suffix .D1	Building Information modelling (Please Download from our website)	3m LSF LSF. 3
Correlated colour temp suffix .TW	Emergency Dali suffix .EMD3	Emergency Self Test suffix .EMST3	5m LSF LSF. 5
			7m LSF LSF. 7

LED PERFORMANCE

25° Ambient Temperature	L70/B50	L80/B50
FORCE 22	100,000	70,000

'L' Value = % of initial Lumens maintained after specified time
'B' Value = % of fittings falling to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

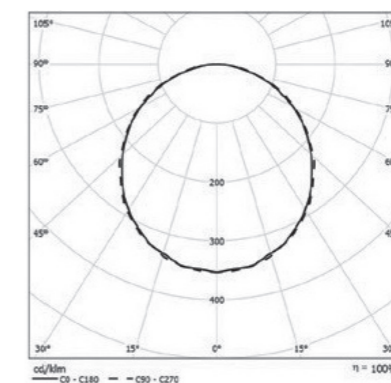

- FORCE 22
- Output - 6200
- 44W
- LOR - 100%
- SHR MAX = 1.6:1