

Galactic 195



Diamond Facet 320



Specular 321



Flush 322

133

LI/cW

L70

75,000

PRODUCT DESCRIPTION

The Galactic 195 is essentially the big brother of the 150. Engineered to the same exacting standards, this LEDdownlight is equally appealing and also highly efficient. Acast aluminium body again ensures excellent thermal control of the latest LEDtechnology, which produces an impressive output of up to 133 LI/cW and 3700 delivered lumens overall, with maximum light transmission through the highly efficient optics is also maintained. Restricting glare to comfortable levels is vital asare sprung side suspensions and plug and socket remote driver to reduce installation time to a minimum.

Available in arange of outputs and distributions to suit awide variety of applications, the GALACTIC 195 is ideal for reception, general circulation and commercial areas.

IP54 rated version also available for use in changing areas, wet rooms & water closets.

FEATURES

IP40

Ingress Protection


IP54

Ingress Protection Flush(322)

4000k

Colour Temperature

DIMENSIONS

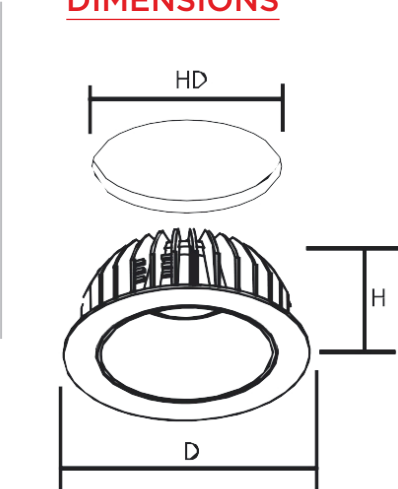

	mm
H	81
D	195
HD - cut out	180
MCT *	30
KG**	0.95
KG (Em)***	1.95

* Maximum Ceiling Thickness ** inc. driver *** inc. driver & em pack

PRODUCT DATA

GALACTIC 195					
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW	Em Lumens
Diamond Facet					
320.1600.840	12	1600	4000	133	320
320.2100.840	16	2100	4000	131	320
320.2700.840	22	2700	4000	123	320
320.3700.840	29	3700	4000	128	320
Specular					
321.1600.840	12	1600	4000	133	320
321.2100.840	16	2100	4000	131	320
321.2700.840	22	2700	4000	123	320
321.3700.840	29	3700	4000	128	320
Flush					
322.1400.840	12	1400	4000	117	300
322.1800.840	16	1800	4000	113	300
322.2200.840	20	2200	4000	110	300
322.3100.840	27	3100	4000	115	300

PRODUCT OPTIONS

3000k

Correlated colour temp suffix .830

5700k

Correlated colour temp suffix .857

EM

3hr Emergency suffix .EM3

Dali

Dali suffix .D1

Emergency Dali

Emergency Dali suffix .EMD3

ST

Emergency Self Test suffix .EMST3

1m

1m LSF LSF. 1

3m

3m LSF LSF. 3

5m

5m LSF LSF. 5

7m


7m LSF LSF. 7

LED PERFORMANCE

25° Ambient Temperature	L70/B10
GALACTIC 195	75,000

'L' Value = % of Initial Lumens maintained after specified time
'B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

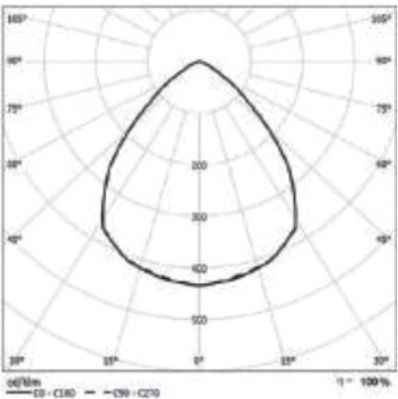

- GALALCTIC 195 FACETTED
- Output - 3700
- Watts - 29
- LOR - 100%
- SHR MAX - 1.3:1 (310, 311)
- SHR MAX - 1.5:1 (312)