



PRODUCT DESCRIPTION

The KINGSLEY LED exterior wall lights. Industrial styling provides substantial presence. An output of up to 4025 lumens with efficacy at up to 112 LI/cW and three distributions for maximum versatility, (General 45° Lens as standard).


Extruded and cast aluminium construction, finished in a dark grey powdercoat (RAL7043) over a chromate conversion then sealed to IP65 during final assembly plus tempered clear flat glass lens.

Whether wall-mounted or surface-mounted, the KINGSLEY offers both direct and indirect lighting options to illuminate facades, building entrances and public areas.

FEATURES

- IP65 Ingress Protection
- 4000k Colour Temperature
- DG Grey RAL7043

DIMENSIONS

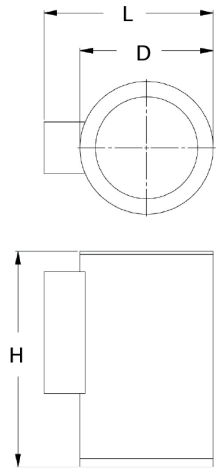

(mm)	770	771	772
H	250	250	464
L	155	200	200
D	155	155	155
KG	2.2	2.2	3.2

PRODUCT DATA

KINGSLEY					
Product code	Distribution	Circuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW
Ceiling Mount (down)					
770.L45.1060.840	General	9.5	1060	840	112
770.L45.1450.840	General	13	1450	840	112
770.L45.2015.840	General	19	2015	840	106
Wall Mount 1-Way (up or down)					
771.L45.1060.840	General	9.5	1060	840	112
771.L45.1450.840	General	13	1450	840	112
771.L45.2015.840	General	19	2015	840	106
Wall Mount 2-Way (up & down)					
772.L45.2115.840	General	19	2115	840	112
772.L45.2900.840	General	26	2900	840	112
772.L45.4025.840	General	38	4025	840	106

PRODUCT OPTIONS

- 3000k Correlated colour temp suffix .830
- L30 30° Narrow Lens suffix .L30
- L60 60° Wide Lens suffix .L60




LED PERFORMANCE

25° Ambient Temperature	L80/B10
KINGSLEY	60,000

'L' Value = % of Initial Lumens maintained after specified time
'B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

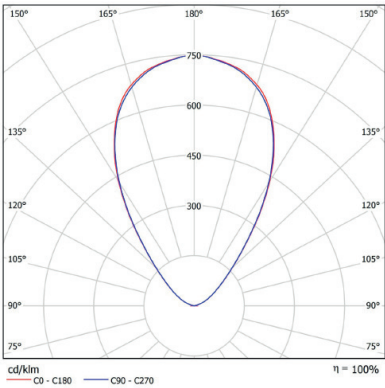

- Kingsley (771 General)
- Output - 2900
- Watts - 28
- LOR - 100%