

Neon Wave & Neon Micro Connectors



PRODUCT DESCRIPTION

IP Rated Silicone Injection-Moulded Connectors for Neon Wave & Micro LED Strips

Flick's Neon Wave and Micro LED strip ranges are supplied complete with IP68-rated silicone injection-moulded connectors, ensuring a fully integrated solution straight out of the box.

Designed for durability and performance, these connectors offer exceptional resistance to water, UV, and extreme temperatures. The type of connector provided is determined by the specific requirements of each installation, making them ideal for projects in wet environments, customised length applications, and areas exposed to harsh conditions or physical stress during construction. This tailored approach ensures reliable, long-lasting performance in even the most demanding settings.

FEATURES

IP67 Ingress Protection Neon Micro

IP68 Ingress Protection Neon Wave

W White

POWER FEEDS




STRAIGHT FEED
Suffix .SF



SIDE FEED
Suffix .LF Left Feed or .RF Right Feed



BOTTOM FEED
Suffix .BF

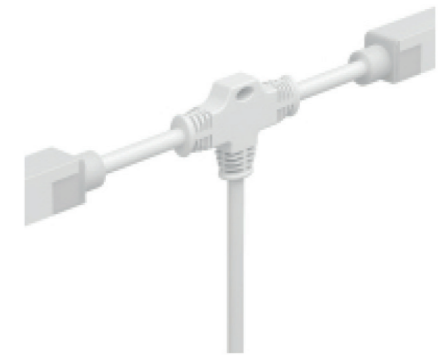

T-Feed
Suffix .TF

CONNECTORS & END CAP



STRAIGHT CONNECTOR
Suffix .SC



END CAP
SUFFIX .EC

Above codes are with cable length of 1000mm Other lengths available on request.
Note - mid connector 300mm only.