

Nimbus



PRODUCT DESCRIPTION

The NIMBUS, a decorative LED luminaire, elevates the ambiance of any indoor space. This sleek, surface-mounted fixture offers direct downward illumination, ideal for offices, educational facilities, retail stores, and public areas. An opal PMMA diffuser delivers a soft and even spread of light, minimizing glare and creating a comfortable environment.


The NIMBUS offers versatile mounting options – mount it directly to the ceiling for a clean look or utilize optional suspension accessories (available separately) for a striking pendant design. The durable steel housing ensures long-lasting performance, and the classic white finish (RAL9003) complements a variety of décor styles.

A convenient push-in terminal simplifies installation. Available with a choice of finishes and diffusers, the NIMBUS offers a perfect blend of style, functionality, and versatility, making it a perfect choice for a wide range of lighting applications.

FEATURES

-  Ingress Protection
-  Colour Temperature
-  White

DIMENSIONS

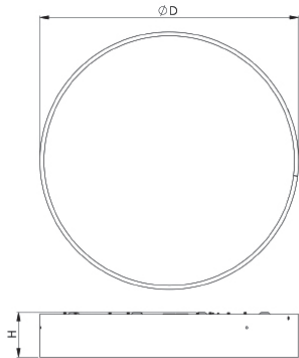

	mm	mm	mm	mm	mm
D	300	450	600	900	1140
H	100	100	100	114	114
KG	2.5	4.2	7.1	14.1	22.8

PRODUCT DATA

NIMBUS						
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW	Diffuser	Dimension (mm)
415.300.2050.840	16	2050	4000	128	OPAL	300
415.300.2750.840	21	2750	4000	131	OPAL	300
415.450.4100.840	30	4100	4000	137	OPAL	450
415.450.5550.840	44	5550	4000	126	OPAL	450
415.600.6250.840	45	6250	4000	139	OPAL	600
415.600.8600.840	63	8600	4000	137	OPAL	600
415.900.10550.840	73	10550	4000	145	OPAL	900
415.900.13450.840	94	13450	4000	143	OPAL	900
415.1140.16550.840	112	16550	4000	148	OPAL	1140
415.1140.21100.840	146	21100	4000	145	OPAL	1140
416.300.1800.840	16	1800	4000	113	MICRO PRIS	300
416.300.2450.840	21	2450	4000	117	MICRO PRIS	300
416.450.3600.840	30	3600	4000	120	MICRO PRIS	450
416.450.4900.840	44	4900	4000	111	MICRO PRIS	450
416.600.5550.840	45	5550	4000	123	MICRO PRIS	600
416.600.7600.840	63	7600	4000	121	MICRO PRIS	600
416.900.9350.840	73	9350	4000	128	MICRO PRIS	900
416.900.11950.840	94	11950	4000	127	MICRO PRIS	900

PRODUCT OPTIONS


-  Correlated colour temp suffix .830
-  Dali suffix .D1
-  3hr Emergency suffix .EM3
-  Emergency Self Test suffix.EMST3
-  Emergency Dali suffix .EMD3
-  Grey suffix .G
-  Red suffix .R
-  Black suffix .B
-  Green suffix .GR
-  Blue suffix .BL
-  Suspended version suffix .SUS
-  Microwave Occupancy Detection suffix .S3
-  Microwave Occupancy Detection with corridor function suffix .S4

LED PERFORMANCE

25° Ambient Temperature	L80/B10
NIMBUS	50,000

'L' Value = % of Initial Lumens maintained after specified time
'B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

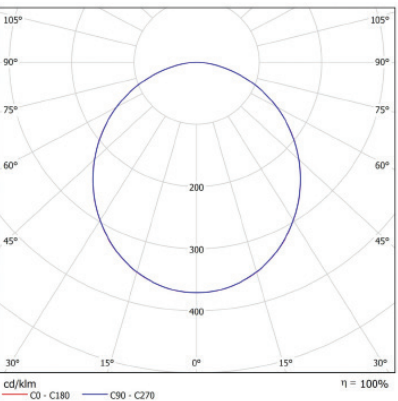

- NIMBUS
- Output – 2009
- Watts – 15.9
- LOR -100%