


Sheldon



Tilted position



PRODUCT DESCRIPTION

The SHELDON is a recessed, adjustable LED spotlight with an output of up to 137 LI/cW and 3500 delivered lumens overall.


Supplied as standard with a 40° multi-faceted reflector and PMMA diffuser, it features a sleek, retractable white aluminium body with an adjustable tilt of up to 65° and 355° rotation.

With three beam angles to choose from, it offers versatility to suit any accent lighting application. Ideal for retail, restaurants, architectural, commercial and exhibition lighting.

FEATURES

- Ingress Protection
- Colour Temperature
- White

DIMENSIONS

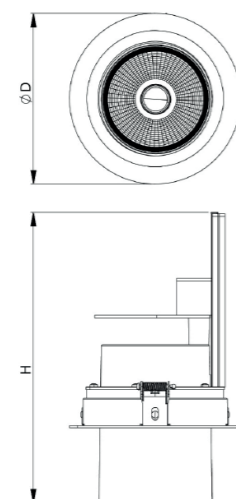

	mm
H	170
D	125
Cut out	118
KG	0.85

PRODUCT DATA

SHELDON				
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW
40° GENERAL BEAM				
350.MF40.1920.840	14	1920	4000	137
350.MF40.2610.840	20	2610	4000	131
350.MF40.3520.840	27	3520	4000	130
3000K				
350.MF40.1820.830	14	1820	3000	130
350.MF40.2270.830	20	2270	3000	114
350.MF40.3330.830	27	3330	3000	123

PRODUCT OPTIONS


- Correlated colour temp suffix .830
- Dali suffix .D1
- Building Information modelling (Please Download from our website)
- Multi Facet 25° Narrow Beam .MF25
- Multi Facet 60° Wide Beam .MF60
- Black Finish suffix .B

LED PERFORMANCE

25° Ambient Temperature	L80/B10
SHELDON	60,000

'L' Value = % of initial Lumens maintained after specified time
'B' Value = % of fittings falling to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

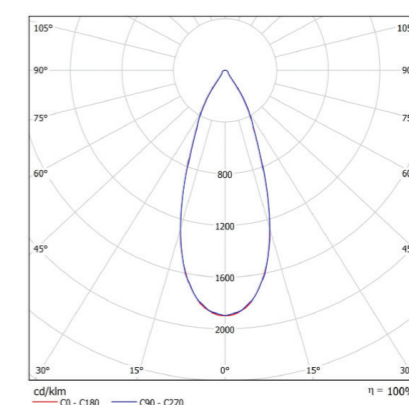

- Sheldon 130 MF40
- Output - 1820
- Watts - 13.5
- LOR - 100%