


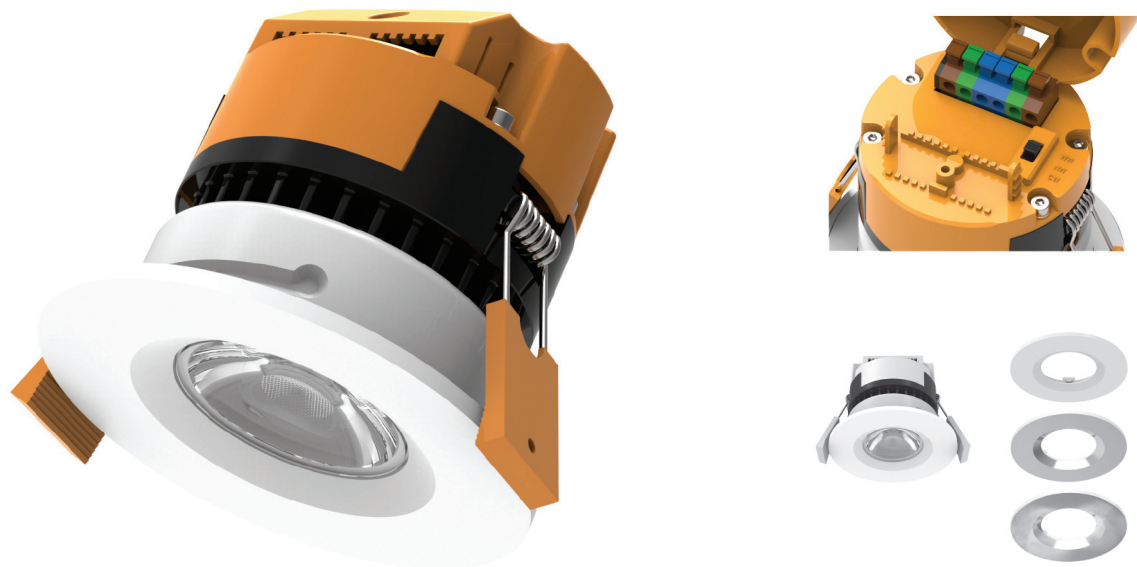

91

lm/cw

L80

30,000

PRODUCT DESCRIPTION

The SOLA fire-rated downlight range redefines performance and versatility in downlighting. Boasting an efficacy of up to 91 lumens per watt (Lm/W), it delivers a powerful 550 lumens overall. The removable bezel comes in three stylish colours, with white as standard. This, combined with its impressive IP65 rating, makes the SOLA suitable for even damp environments. Installation is effortless thanks to the innovative Push-in terminal, offering wider terminal access and loop in/loop out connection.

For ultimate control, the SOLA features 3CCT (Colour Correlated Temperature) options, conveniently selectable via a DIP switch. This allows you to tailor your lighting to any mood. Additionally, the SOLA is compatible with triac dimmers for smooth dimming capabilities. Leveraging energy-saving LED technology, the SOLA delivers optimal performance while minimizing energy consumption and lowering your costs. Simple, cost-effective, and exceptional, the SOLA downlight range is the perfect solution for a wide range of commercial and residential applications.

FEATURES

- IP65

Ingress Protection
- CCT

Adjustable CCT
- W

White Bezel

DIMENSIONS

	mm
H	76
D	86.5
Cut out	73
KG	1.00

PRODUCT DATA

SOLA				
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy Ll/cW
301.550.CCT	6	550	2700/4000/6500	91

PRODUCT OPTIONS

- C

Chrome Bezel
suffix .C
- SN

Satin Nickel Bezel
suffix .SN

LED PERFORMANCE

25° Ambient Temperature	L80/B50
SOLA	30,000

'L' Value = % of initial Lumens maintained after specified time
'B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

