


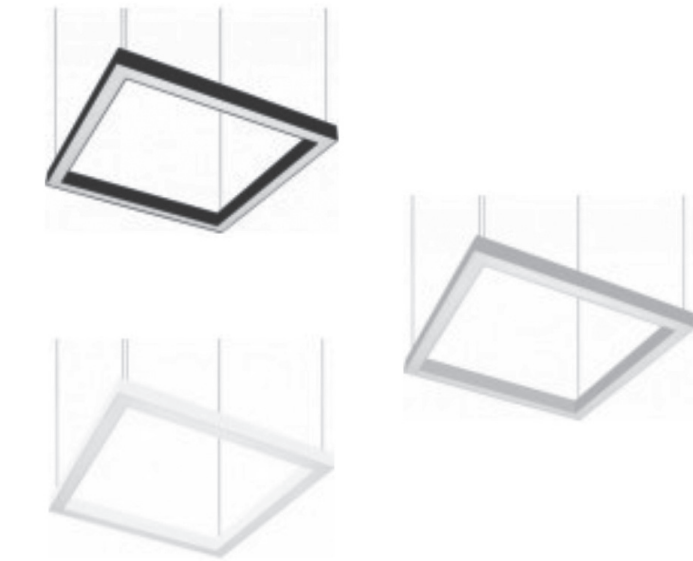

The QUAD, a captivating LED luminaire in a modern ring shape, elevates both aesthetics and functionality in any indoor environment. Offering an impressive output of up to 134Lm/Cw and up to 11180 delivered lumens in three different body sizes, it seamlessly integrates into various spaces. Choose from either the standard PMMA opal diffuser or the matt micro-prismatic for superior glare control. The QUAD is housed in an aluminium body finished in silver grey (RAL9006), with custom colour options available upon request.

The QUAD offers surface mount or suspension options (to be specified) and a convenient push-in terminal for electrical connection (cable accessories available separately).

The QUAD's modern design, exceptional performance with advanced control options, and versatile mounting options make it ideal for offices, educational facilities, retail spaces, and public areas. With long-lasting LED technology (50,000 hours L80B10) and IP40 ingress protection, the QUAD offers a reliable and visually striking lighting solution.

- IP40
- Colour Temperature 4000k
- Grey (RAL9006)

	mm	mm	mm
L	620	900	1180
W	620	900	1180
H	68	68	68
KG	4.6	6.6	8.8

STIRLING QUAD					
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW	Dimension (mm sq)
OPAL					
250.3210.840	24	3210	4000	134	620
250.4380.840	34	4380	4000	129	620
250.6020.840	51	6020	4000	118	620
250.4540.840	36	4540	4000	126	900
250.6180.840	52	6180	4000	119	900
250.8380.840	77	8380	4000	109	900
250.6060.840	48	6060	4000	126	1180
250.8240.840	70	8240	4000	118	1180
250.11180.840	103	11180	4000	109	1180
MICRO PRISMATIC					
251.2810.840	24	2810	4000	117	620
251.3830.840	34	3830	4000	113	620
251.5260.840	51	5260	4000	103	620
251.3770.840	36	3770	4000	105	900
251.5120.840	52	5120	4000	98	900
251.6950.840	77	6950	4000	90	900
251.5020.840	48	5020	4000	105	1180
251.6830.840	70	6830	4000	98	1180
251.9270.840	103	9270	4000	90	1180

Correlated colour temp suffix .830	3hr Emergency suffix .EM3	Building Information modelling (Please Download from our website)	White suffix .w	Suspended version suffix .SUS
Dali suffix .D1	Emergency Self Test suffix.EMST3		Black suffix .B	
Emergency Dali suffix .EMD3			Other finishes available – specify RAL code	

25° Ambient Temperature	L80/B10
STIRLING QUAD	50,000

'L' Value = % of initial Lumens maintained after specified time
'B' Value = % of fittings failing to meet operational expectations after specified time

- QUAD - OPAL
- Output - 8383
- Watts - 77.8
- LOR -100%