Stirling Recessed

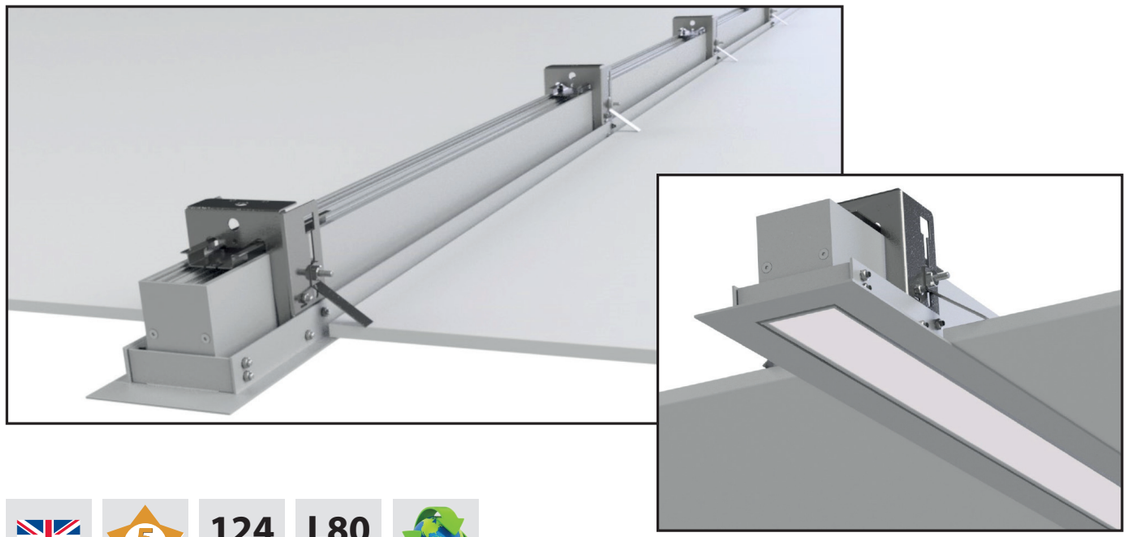

124 lm/W

L80 60,000

PRODUCT DESCRIPTION

The STIRLING RECESSED expands on the outstanding performance and design of the STIRLING pendant system, offering a sleek, recessed alternative for seamless ceiling integration. Retaining the high-output illumination of the STIRLING family, it delivers up to 15,100 lumens with an efficient efficacy of 124 lumens per watt (Lm/W), as detailed in the Product Data Table.

Designed for flexibility, the STIRLING RECESSED is available in single sections up to 4006mm for independent mounting or can be continuously mounted for a seamless, uninterrupted lighting solution. Choose between an opal diffuser for general applications or a microprismatic diffuser for glare control in office settings.

Installation is effortless, thanks to its pre-configured flush-mount design, ensuring a low-profile aesthetic while delivering the same exceptional performance and versatility as the STIRLING pendant system. Constructed for durability, it features a robust extruded aluminium body with snap-in mild steel components. The standard RAL 9006 Silver finish offers a sleek, modern look, with custom colour options available to complement any design.

Perfect for commercial environments such as offices, retail spaces, educational facilities, and hospitality settings, the STIRLING RECESSED combines high performance with sophisticated aesthetics for a premium lighting solution.

For bespoke continuous installations please contact us. We bring your vision to life—whether you have a specific design in mind or unique requirements, we tailor our expertise to create bespoke solutions that meet your exact needs with precision and innovation.

FEATURES

- IP20 — Ingress Protection
- 3m — 3m LSF LSF. 3
- 4000k — Colour Temperature
- S — Silver

DIMENSIONS

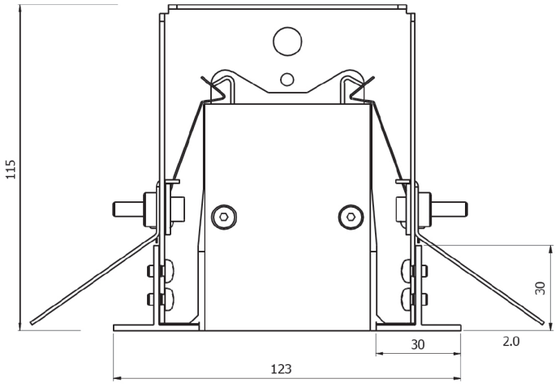

STIRLING	4	5	6	7	8	9	10	11	12	13	14
L (mm)	1132	1412	1692	1974	2254	2534	2814	3094	3374	3654	3934
W (mm)	123	123	123	123	123	123	123	123	123	123	123
H (mm)	115	115	115	115	115	115	115	115	115	115	115
KG	4.7	5.7	7.1	7.4	8.3	9.9	10.8	11.8	12.7	13.6	14.6
KG (Em)	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5

* Note: Wireless Sensor additional 60mm length
* Weight based on independent option.

PRODUCT OPTIONS

- 3000k — Correlated colour temp suffix .830
- 5700k — Correlated colour temp suffix .857
- TW — Correlated colour temp suffix .TW
- EM — 3hr Emergency suffix .EM3
- DALI — Dali suffix .D1
- DALI +EM — Emergency Dali suffix .EMD3
- ST — Emergency Self Test suffix .EMST3
- Wireless suffix .S5
- BIM — Building Information modelling (Please Download from our website)
- B — Black Finish suffix .B
- W — White Finish suffix .W

LED PERFORMANCE

- Colour Temp - 4000k
- Ra (CRI) > 80

25° Ambient Temperature	L70/B50	L80/B50
STIRLING	90,000	60,000

'L' Value = % of initial Lumens maintained after specified time
'B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

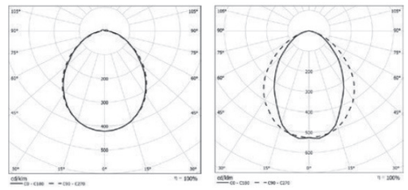

- STIRLING RECESSED
- Output - 10800
- 84 W
- LOR - 100%