



PRODUCT DESCRIPTION

The TERRA, an IP67 ground-mounted LED luminaire, seamlessly integrates into public spaces and facades. Its sleek, brushed stainless-steel housing and frame offer a touch of modern elegance. Offering a wide operating temperature range of -25°C to +40°C ensures long-lasting performance and superior corrosion resistance in any outdoor environment.

The TERRA delivers efficient direct light distribution, guiding pedestrians and enhancing safety. A frosted tempered glass diffuser provides excellent light transmittance, diffusing the light for a soft and pleasant illumination. Additionally, the tempered glass offers exceptional impact resistance for long-lasting durability.

Pre-wired with a 1.0m cable (3x1.5mm²) cable for effortless installation, the TERRA simply secures into the ground. This combination of sleek design, durable construction, and efficient light distribution makes the TERRA a versatile and reliable choice for enhancing the visual appeal and safety of your outdoor space.

FEATURES

- Ingress Protection
- Colour Temperature
- Impact Protection

DIMENSIONS



	mm	mm	mm
L	430	630	1050
W	115	115	115
H	105	105	105
CUT OUT	410 x 105	610 x 105	1025 x 105
KG	3.1	4.6	7.2

PRODUCT DATA

TERRA					
Product code	Curcuit Watts (w)	Delivered Lumens	Colour Temp K	Efficacy LI/cW	Length (mm)
7013.430.840	5	430	4000	86	430
7013.530.840	7	530	4000	76	430
7013.750.840	9	750	4000	83	630
7013.900.840	11	900	4000	82	630
7013.1400.840	17	1400	4000	82	1050
7013.1720.840	20	1720	4000	86	1050
7013.410.830	5	410	3000	82	430
7013.510.830	7	510	3000	73	430
7013.720.830	9	720	3000	80	630
7013.850.830	11	850	3000	77	630
7013.1330.830	17	1330	3000	78	1050
7013.1650.830	20	1650	3000	83	1050

PRODUCT OPTIONS

Correlated colour temp suffix .830

Dali suffix .D1


Building Information modelling (Please Download from our website)

LED PERFORMANCE

25° Ambient Temperature	L80/B10
TERRA	50,000

L' Value = % of initial Lumens maintained after specified time
B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

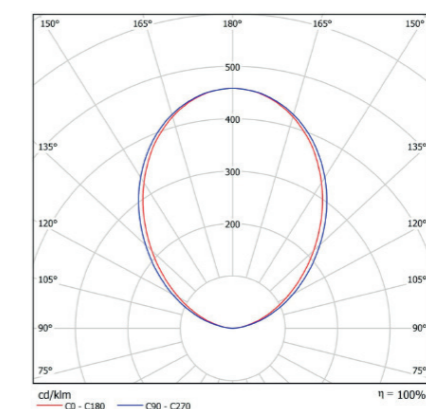

- TERRA
- Output - 1720
- Watts - 19.9
- LOR -100%