


# Tubular Columns 3-6m

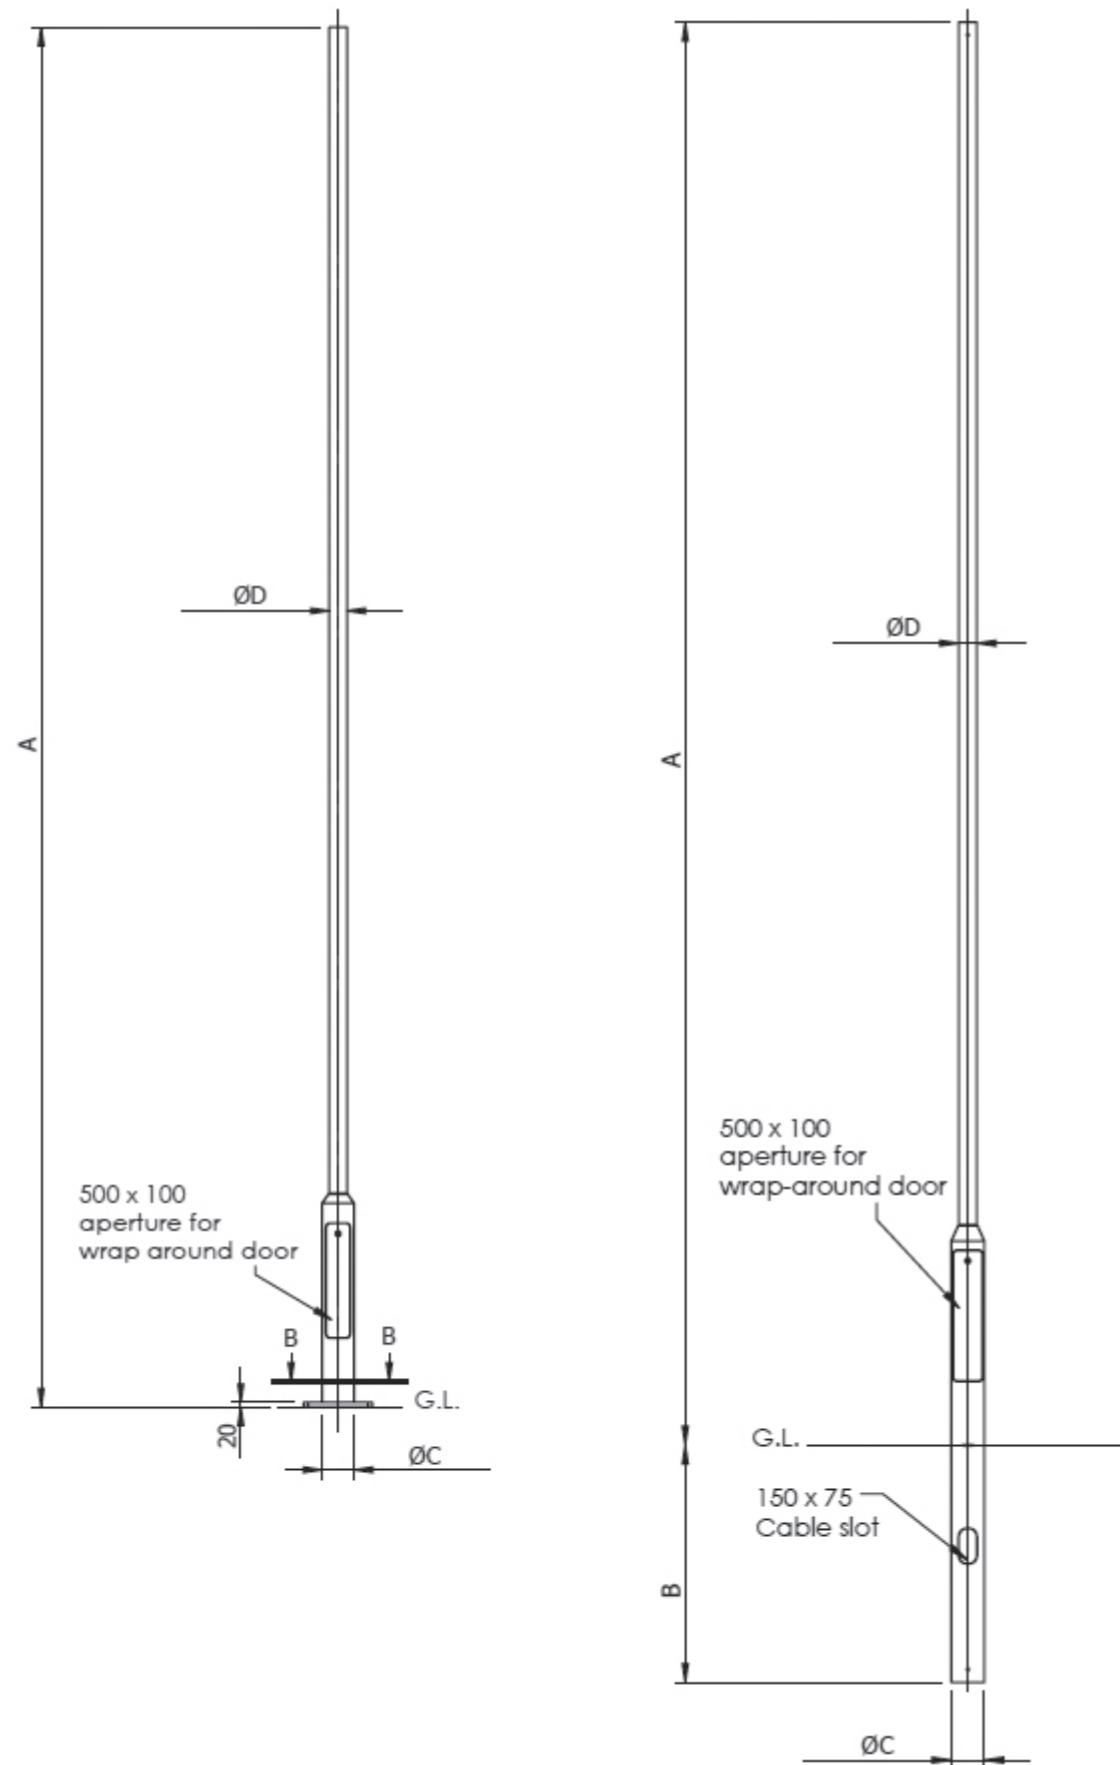

## PRODUCT DATA

### CR - ROOT MOUNTED

Product code	A (M)	B (MM)	C (MM)	D (MM)	DOOR APERTURE	MAX HEAD LOAD (Kg/M <sup>2</sup> )*
710.CR3M	3	800	140	76	500 x 100	50 / 0.05
710.CR4M	4	800	140	76	500 x 100	50 / 0.05
710.CR5M	5	800	140	76	500 x 100	40 / 0.4
710.CR6M	6	1000	140	76	500 x 100	30 / 0.25

### CF - FLANGE PLATED

Product code	A (M)	B (MM)	C (MM)	D (MM)	DOOR APERTURE	MAX HEAD LOAD (Kg/M <sup>2</sup> )*	HOLE CENTRE	BOLTS
710.CF3M	3	N/A	140	76	500 x 100	50 / 0.05	200 x 200	M16
710.CF4M	4	N/A	140	76	500 x 100	50 / 0.05	200 x 200	M16
710.CF5M	5	N/A	140	76	500 x 100	40 / 0.4	200 x 200	M16
710.CF8M	6	N/A	140	76	500 x 100	30 / 0.25	200 x 200	M16

## PRODUCT DESCRIPTION

High-quality general-purpose TUBULAR galvanised steel columns. Available in root mounted or flanged plated, for floodlight or lantern brackets, static or hinged also paint options available.

Constructed from mild steel and root externally bitumen coated as standard. Full range of brackets and spigots available.

Columns manufactured to BSEN40, PD6547:2004+A1:2009  
 Extra heavy wind loading region (no sign)  
 Load class B / Deflection class3

As the choice of columns depends on many factors including the area of installation, weight and windage of both bracket(s) and luminaire(s) we need to ascertain these details before choosing a column type.

\*Maximum design head load based on wind loading region with operation of bracket/ luminaire(s) being on the same plane as door.