

BRIXTON (2 WAY GIMBAL)



PRODUCT DESCRIPTION

The BRIXTON is a recessed adjustable gimbal downlighter with an output of up to 133 LI/cW and 10000 delivered lumens overall.


With an adjustable tilt of up to 80 degrees in any direction, 3 beam angles to choose from and 1, 2 or 3 gimbal housings. The BRIXTON is versatile enough to satisfy every accent lighting scenario.

The BRIXTON is ideal for retail, restaurants, architectural, commercial and exhibition lighting.

FEATURES

- Ingress Protection
- Colour Temperature
- White

DIMENSIONS



	(mm)
L	350
W	200
H	98
CL	327
CW	177
KG	1.9
Em KG	2.4

The 10000 lumen version is 120mm Height

PRODUCT DATA

BRIXTON					
Product code	Circuit Watts (w)	Delivered Lumens	Efficacy LI/cW	Distribution	Em Lumens
363.32.4000	32	4000	133	Narrow	420
363.44.5400	44	5400	128	Narrow	420
363.68.7800	68	7800	118	Narrow	420
363.92.10000	92	10000	108	Narrow	420
364.32.4000	32	4000	133	General	420
364.44.5400	44	5400	128	General	420
364.68.7800	68	7800	118	General	420
364.92.10000	92	10000	108	General	420
365.32.4000	32	4000	133	Wide	420
365.44.5400	44	5400	128	Wide	420
365.68.7800	68	7800	118	Wide	420
365.92.10000	92	10000	108	Wide	420

PRODUCT OPTIONS

Correlated colour temp xxxxxxx.3K	3 hr Emergency xxxxxxx.EM3	Building Information modelling (Please Download from our website)	Black Finish xxxxxxx.B	1m LSF LSF. 1
Correlated colour temp with a CRI > 90 xxxxxxx.927	Dali xxxxxxx.D1		Silver Finish xxxxxxx.S	3m LSF LSF. 3
Correlated colour temp with a CRI > 90 xxxxxxx.930	Emergency Dali xxxxxxx.EMD3			5m LSF LSF. 5
				7m LSF LSF. 7


LED PERFORMANCE

- Colour Temp 4000k
- Ra (CRI) >80

25° Ambient Temperature	L70/B50	L80/B50
BRIXTON (2 WAY)	100,000	100,000

'L' Value = % of initial Lumens maintained after specified time
'B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

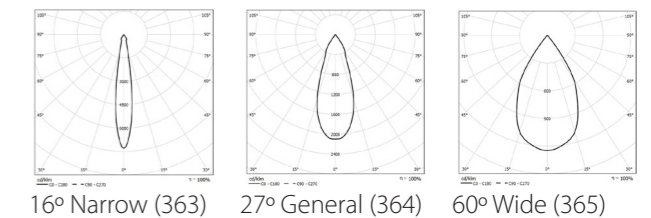

- **BRIXTON**
- Output - 10000
- Watts - 92
- LOR - 100%