


FORCE 22 EDGE

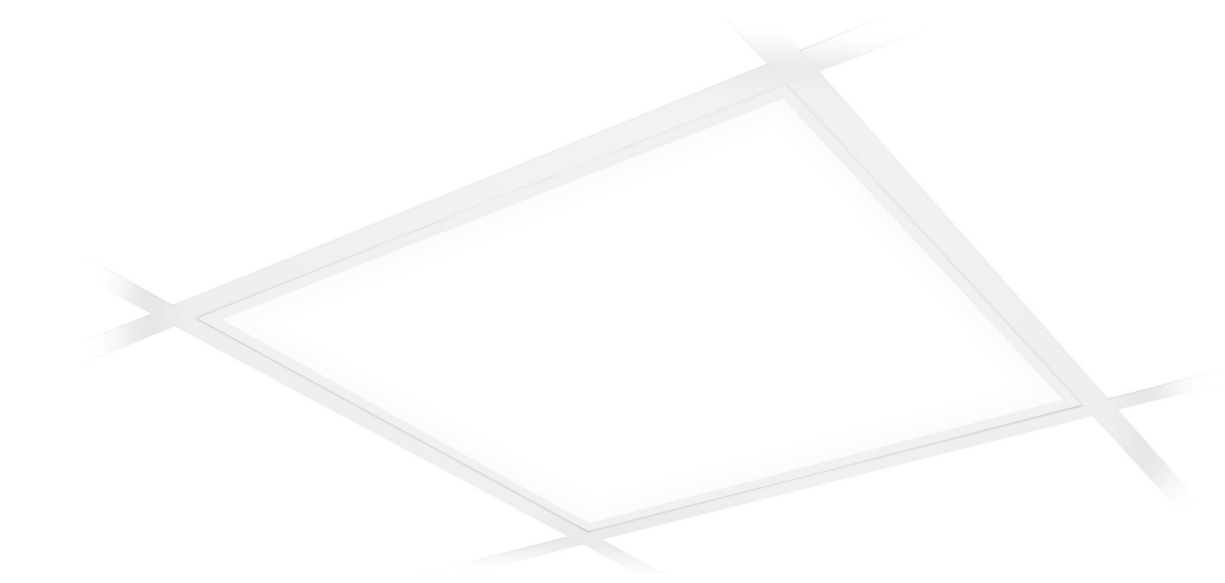

PRODUCT DESCRIPTION

The FORCE 22 EDGE, LED is a 600mm x 600mm modular panel and has been designed using side lit light guide technology. Offering good efficiency in an extremely light weight, low profile, high economy package.


At 12mm the panel depth is no deeper than many ceiling tiles and significantly shallower than even the ceiling grid. This gives the FORCE 22 EDGE the advantage of being installable in places other luminaires simply won't fit. With an output of up to 105 LI/cW and 3800 delivered lumens.

The range is further enhanced by a choice of evenly lit opal diffuser or UGR19* microprismatic controller available in TP(a) or TP(b) plastic.


Solidly constructed from an extruded aluminium frame and sheet steel backplate. Tridonic control gear as standard and pre-wired flex options are available to ensure ease of installation. The Force 22 EDGE is ideal for open offices, classrooms, general corridors and commercial areas.

*UGR19 compliance is dependant on room geometry and reflectances.

FEATURES



DIMENSIONS

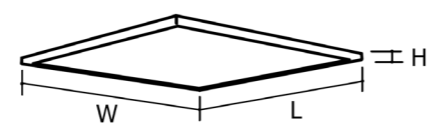


	(mm)
H	12
W	595
L	595
KG	2.5
KG (Em)	3.5

PRODUCT DATA

FORCE 22 EDGE					
Product code	Circuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW	Em Lumens
Opal					
114.19.1800	19	1800	4000	99	320
114.25.2500	24	2500	4000	99	320
114.33.3200	32	3200	4000	97	320
114.40.3800	40	3800	4000	95	320
TP(b) Prismatic*					
115.28.2900	28	2900	4000K	105	320
115.37.3800	37	3800	4000K	102	320
TP(a) Prismatic*					
116.28.2900	28	2900	3000K	94	320
116.37.3800	37	3800	3000K	95	320


PRODUCT OPTIONS

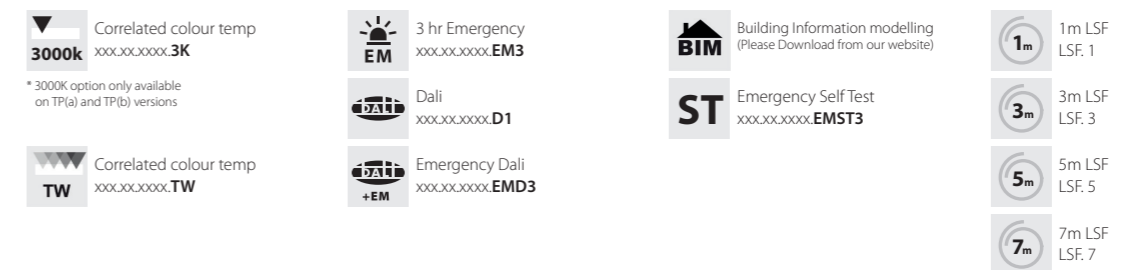

LED PERFORMANCE

25° Ambient Temperature	L70/B50	L80/B50
FORCE 22 EDGE	50,000	20,000

PHOTOMETRIC PERFORMANCE



- **FORCE 22 EDGE**
- Output - 3800
- Watts - 37
- LOR - 100%
- SHR MAX - 1.6:1

¹L' Value = % of initial Lumens maintained after specified time
²B' Value = % of fittings failing to meet operational expectations after specified time