


SAVO



PRODUCT DESCRIPTION


The SAVO LED exterior ground light, a stylish buried LED uplighter. Ideal for pathways, gardens, entrances, car parks and pedestrian areas. Available with two beam widths with an output of up to 1700 lumens and an efficacy of up to 91 LI/cW.

Sealed to IP67 and impact resistant to IK10. Corrosion resistant housing, complete with stainless steel trim and tempered clear flat glass.

FEATURES



DIMENSIONS



	(mm)
D	200
H	235
KG	4.5


PRODUCT DATA

SAVO				
Product code	Beam Angle	Circuit Watts (w)	Delivered Lumens	Efficacy LI/cW
7010.11.1000	45 Deg FWHM	11	1000	91
7010.15.1300	45 Deg FWHM	15	1300	87
7010.23.1700	45 Deg FWHM	23	1700	74
7011.11.1000	60 Deg FWHM	11	1000	91
7011.15.1300	60 Deg FWHM	15	1300	87
7011.23.1700	60 Deg FWHM	23	1700	74

LED PERFORMANCE

25° Ambient Temperature	L70/B50
SAVO	50,000

PHOTOMETRIC PERFORMANCE

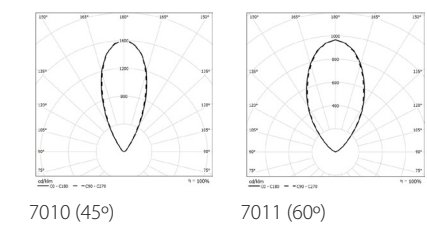

- SAVO
- Output - 1700
- 23w
- LOR - 100%

*L' Value = % of initial Lumens maintained after specified time
 *B' Value = % of fittings failing to meet operational expectations after specified time