





STIRLING 6

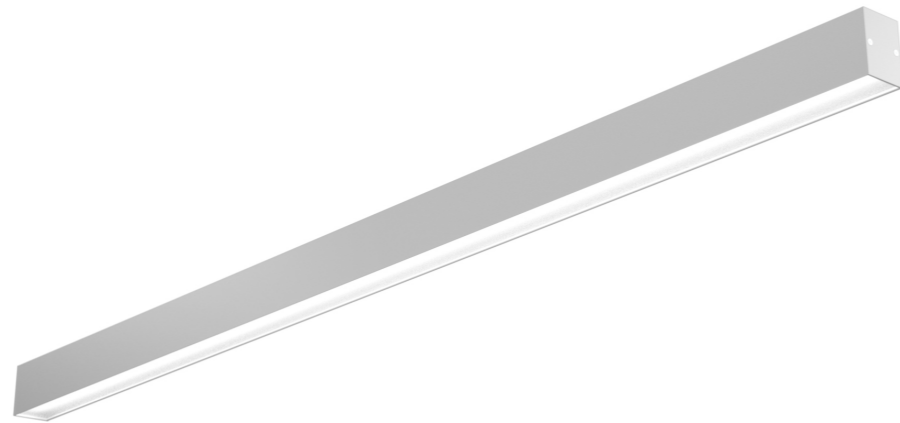

MS11



MS12



MS13

(MS12 for Direct range only)



PRODUCT DESCRIPTION

The STIRLING 6 is the 1700mm option in the STIRLING linear suspended lighting system. Designed to be slimline with pleasing proportions, the STIRLING range is available in single piece lengths up to 2800mm which can also be continuously mounted. The STIRLING 6 has an output of up to 9400 lumens and efficacy at up to 117 LI/cW.


Versatility is further enhanced by options for direct only or direct/indirect and diffuser options of opal for general lighting or microprismatic for office low glare requirements.

Installation is simplified by inclusion of a 3 metre flying lead as standard and adjustable suspensions that can be placed at any point along the length. Robustly engineered construction consisting of an extruded aluminium body and snap in mild steel GT and bracketry. Finished in RAL 9006 as standard.

FEATURES

- Ingress Protection
- Colour Temperature
- 3 metre LSF
- Silver Finish

DIMENSIONS



	Direct (mm)
L	1686
W	58
H	80
KG	4.9
KG (Em)	+ 0.5

* Note: OA length includes endplates.
* Note: Wireless Sensor additional 60mm

PRODUCT DATA

STIRLING 6						
Product code	Circuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW	Diffuser Option	Em Lumens
Direct						
266.30.3000	30	3000	4000	102	Opal	410
266.46.4500	46	4500	4000	99	Opal	410
266.55.5800	55	5800	4000	105	Opal	410
276.11.1300	11	1300	4000	113	Micro Prismatic	430
276.30.3200	30	3200	4000	108	Micro Prismatic	430
276.46.4800	46	4800	4000	105	Micro Prismatic	430
276.55.6200	55	6200	4000	111	Micro Prismatic	430
Direct/Indirect (70%/30%)						
286.55.6200	55	6200	4000	112	Opal	410
286.68.7600	68	7600	4000	112	Opal	410
286.82.9000	82	9000	4000	110	Opal	410
296.29.3200	29	3200	4000	112	Micro Prismatic	430
296.55.6400	55	6400	4000	117	Micro Prismatic	430
296.68.8000	68	8000	4000	117	Micro Prismatic	430
296.82.9400	82	9400	4000	114	Micro Prismatic	430

PRODUCT OPTIONS

Colour Correlated colour temp xxx.xx.xxxx.3K Correlated colour temp xxx.xx.xxxx.5K Correlated colour temp xxx.xx.xxxx.TW	3hr Emergency xxx.xx.xxxx.EM3 Dali xxx.xx.xxxx.D1 Emergency Dali xxx.xx.xxxx.EMD3 Emergency Self Test xxx.xx.xxxx.EMST3	Wireless xxx.xx.xxxx..S5 Building Information modelling (Please Download from our website) Black Finish xxx.xx.xxxx..B	Cable 1m LSF LSF.1 5m LSF LSF.5 7m LSF LSF.7	Mounting Systems MS11 - Coupler Kit MS12 - Surface Mount Kit MS13 - Suspension Kit
--	--	--	--	--


LED PERFORMANCE

- Colour Temp 4000k
- Ra (CRI) >80

25° Ambient Temperature	L70/B50	L80/B50
Stirling 6	90,000	60,000

L' Value = % of initial Lumens maintained after specified time
B' Value = % of fittings falling to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE

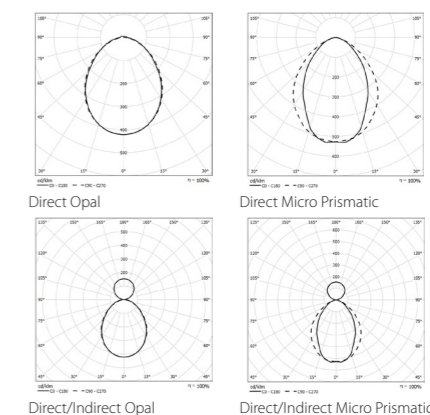

- STIRLING 6
- Output - 9400
- LOR - 100%