


FORCE 41 EDGE

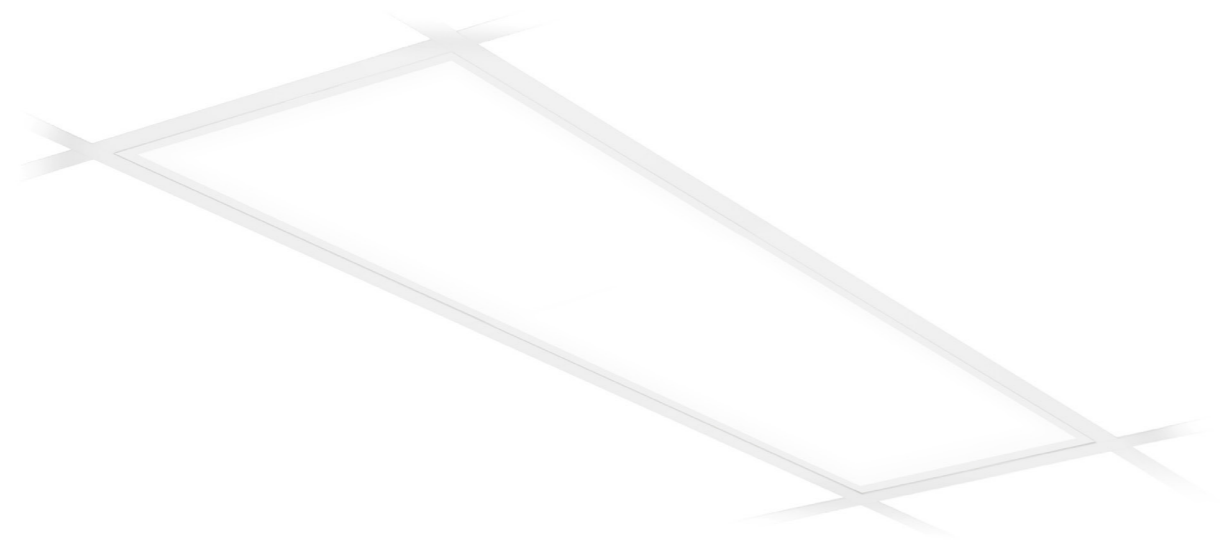

PRODUCT DESCRIPTION

The FORCE 41 EDGE LED panel has been designed using side lit light guide technology offering good efficiency in an extremely light weight, low profile, high economy package. At 10mm the panel depth is no deeper than many ceiling tiles and significantly shallower than the ceiling grid. This gives the FORCE41 EDGE the advantage of being installable in places other luminaires simply won't fit.


The output of up to 104 LI/cW and 2800 delivered lumens is smoothly controlled by the edge lit optics, high efficiency diffuser and reflector elements, eliminating harsh contrast and providing a flawless low glare light transmission while achieving optimum wall and ceiling illuminance. Solidly constructed from an extruded aluminium frame and sheet steel backplate.

Tridonic control gear as standard and pre-wired flex options are available to ensure ease of installation. The FORCE 41 EDGE is ideal for open offices, classrooms, general corridors and commercial areas.

FEATURES

Ingress Protection
 Colour Temperature

DIMENSIONS

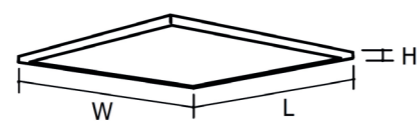

	(mm)
H	10
W	295
L	1195
KG	2.5
KG (Em)	3.5

PRODUCT DATA

FORCE 41 EDGE					
Product code	Circuit Watts (w)	Delivered Lumens	Colour Temp	Efficacy LI/cW	Em Lumens
117.15.1500	15	1500	4000	100	360
117.22.2200	22	2200	4000	100	360
117.27.2800	27	2800	4000	104	360

PRODUCT OPTIONS

Colour
 Correlated colour temp xxxxxxxx.3K
 Correlated colour temp xxxxxxxx.5K
 Correlated colour temp xxxxxxxx.TW
 3hr Emergency xxxxxxxx.EM3
 Dali xxxxxxxx.D1
 Emergency Dali xxxxxxxx.EMD3
 Emergency Self Test xxxxxxxx.EMST3

Sensors
 Building Information modelling (Please Download from our website)
 Wireless xxxxxxxx.S5


Cable
 1m LSF LSF.1
 3m LSF LSF.3
 5m LSF LSF.5
 7m LSF LSF.7

LED PERFORMANCE

25° Ambient Temperature	L70/B50
FORCE 41 EDGE	50,000

'L' Value = % of initial Lumens maintained after specified time
 'B' Value = % of fittings failing to meet operational expectations after specified time

PHOTOMETRIC PERFORMANCE



- FORCE 41 EDGE
- Output - 2800
- Watts - 27
- LOR - 100%
- SHR MAX - 1.6:1